

PRODUCT INFORMATION

Dual Approved Powderfree Nitrile Gloves

Description:

When strength and dexterity are of the utmost importance, our allergy-free Powderfree Nitrile Gloves are the ideal choice. From food handling to engineering, these versatile gloves are sure to suit the task at hand.

- ✓ Medical Grade AQL 1.5
- ✓ Conforms to EN 455
- ✓ BS EN 374-1/Type B
- ✓ Tested in accordance with BS EN 420:2003+A1:2009
- ✓ Latex free
- ✓ Micro textured
- ✓ Dual approved for medical and industrial use
- ✓ Excellent barrier protection
- ✓ AQL 1.5
- ✓ Textured finger tips
- ✓ Moulds to shape of hand
- ✓ Can be worn under working gloves
- ✓ Low chemical contact use

Type:

Nitrile
Powder free

Applications:

Clinical tasks, laboratories, food processing, food handling, automotive and engineering

	EN ISO 374-1:2016/Type B	Chemical Class	Levels	EN 374-4:2013 Degradation
K	40% Sodium Hydroxide	Inorganic Base	6	-18.1%
T	37% Formaldehyde	Aldehyde	5	24.7%
P	30% Hydrogen Peroxide	Peroxide	6	33.7%

Product Codes:

12671-4 S - XL Nitrile Powder Free - Black

Colourways:

 Black



PPE Regulation (EU) 2016/425

Plastic Materials and Articles in Contact with Food Regulation (EU) No 10/2011

EN 374-1:2016/Type B

EN 374-4:2013 % Degradation

EN ISO 374-5:2016

Standards:

EN ISO 374-5:2016
Protection against
Bacteria & Fungi
(and Viruses)

EN ISO 374-1:
2016/Type B



Product is free
from powder




Product does not
contain latex



Single use only
Do not reuse



Suitable for use
with food



Size Chart:

Measurements in mm	7 (S)	8 (M)	9 (L)	10 (XL)	11 (2XL)
Hand Length (A)	171	182	192	204	215
Hand Circumference (B)	178	203	229	254	279


Issue No.: 1

Issue Date: 13.09.2019


SUPERTOUCH®

Packaging: 100 pieces per dispenser - 10 dispensers per case

Outer Carton Artwork:

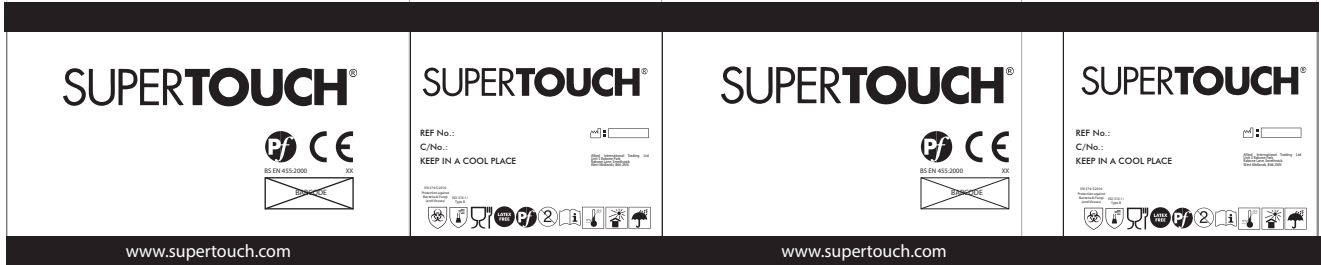

Inner Artwork:

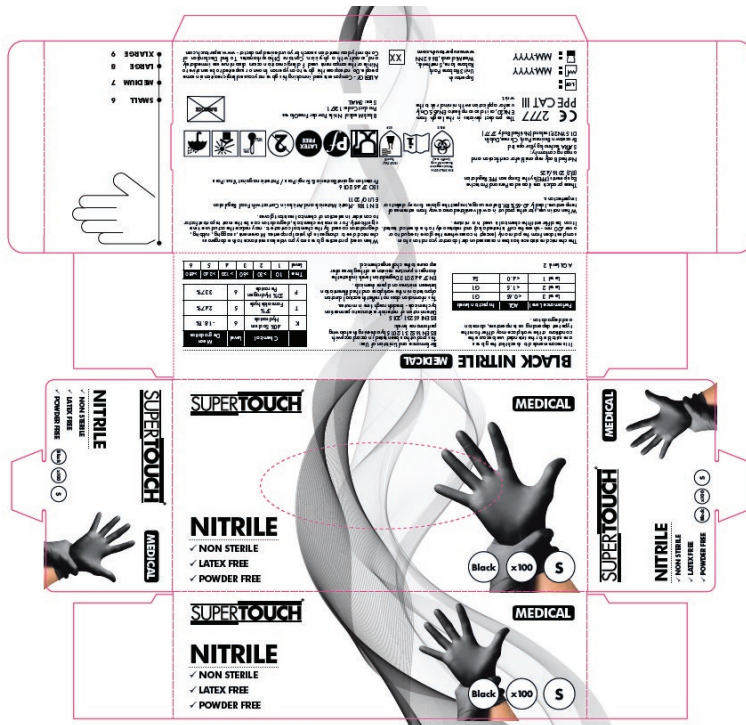

The information shown on this specification sheet is intended as a guide and is advisory only. All details were correct at the time of issue. As conditions of use are ultimately beyond our control, we advise that the product is tested for the particular application before use.