



PRODUCT INFORMATION

Supertex® Type 5/6 Coverall

Description:

Durable, breathable and comfortable, our Supertex® Coverall offers ultimate head to toe protection. These coveralls protect against dust particles, low risk chemical splash and protection of barrier to radioactive particulates. Made of soft lightweight material with a microporous lamination finish. They are suitable for asbestos removal, insulating, paint spraying, hygiene rules, use with low risk chemicals, horticulture, farming and general building work.

- ✓ Cat III Complex Design
- ✓ Type 5- EN 13982-1 Protection against airborne solid particles
- ✓ Type 6 - EN 13034- Protection against low risk chemical splash
- ✓ EN 1073-2 - Class 1 Protection of barrier to radioactive particulates
- ✓ EN 1149 Anti-Static
- ✓ Protects against dust particles
- ✓ Lint Free
- ✓ Breathable
- ✓ Zip with zip guard
- ✓ Elasticated wrist/ankle closure
- ✓ Elasticated 3 panel hood design
- ✓ Individually wrapped

Applications:

Suitable for Asbestos related work, insulating, hygiene rules, clean rooms, liquid chemicals (low hazard), electronic assembly, paint spraying, horticulture, farming & General building work

Note: When working with asbestos removal activity suitable PPE must be worn at all times.

Colourways:

White

Product Codes:

17801-7 S - 4XL Coverall - White

Standards:

CE 0338 CAT III

EN 13982-1 (Type 5)



EN 13034 (Type 6)



EN 1073-2 Class 1



EN 1149




PPE Regulation (EU) 2016/425

EN 13982-1 Type 5 Protection

EN 13034 Type 6 Protection

EN 1073-2 Class 1

EN 1149 Anti-Static



Size Chart:

Measurements in cm	S	M	L	XL	2XL	3XL	4XL
To fit (A)	92 - 96	100 - 104	106 - 112	116 - 122	124 - 132	136 - 144	148 - 152


Issue No.: 5

Issue Date: 01.04.2020

SUPERTOUCH®

Packaging: 1 piece per bag - 50 bags per case

Outer Carton Artwork:

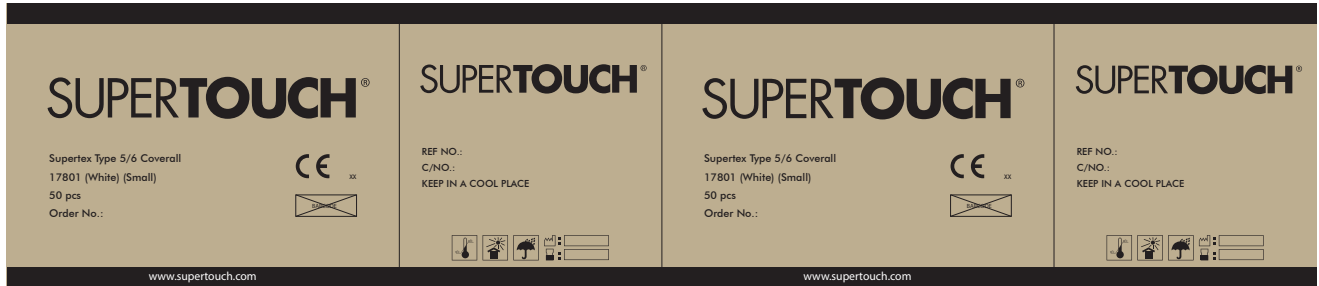

Feature Symbols:



Single use only
Do not reuse



Product packed
in retail bags

The information shown on this specification sheet is intended as a guide and is advisory only. All details were correct at the time of issue. As conditions of use are ultimately beyond our control, we advise that the product is tested for the particular application before use.